





# H4

## HYDRANTS


### Design features

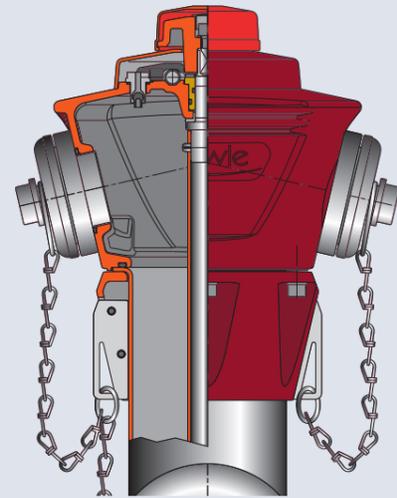

- modern design
- O rings embedded in non corrosive material (according to DIN 3547-T1)
- minimum torque for opening and closing of the hydrant
- noticeable stop at the limits when opening and closing the hydrant's valve
- hydrant head can be swiveled from 0° bis 360°



- easiest repair of the break-away line
- spare bolts for quick repair of the break-away line are contained under the cap
- safety bar of the spindle housing in the area of the break-away line
- problem free exchange of all inner parts



- remaining water content „0“ according to DIN 3321
- automatic drain off system with pressure control
- drain outlet connection possible with PE pipe Ø 32 mm

Illustrations, technical data, dimensions and weights are subject to alteration without notice.

distributed by:



**E. Hawle Armaturenwerke GmbH**  
 A-4840 Vöcklabruck - AUSTRIA  
 Wagrainer Straße 13  
 www.hawle.at

Telefon: +43 (0)7672-725 76-0 Serie  
 Telefax: +43 (0)7672-784 64  
 E-mail: hawle@hawle.at



# HYDRANTS





# H4 HAWLE-HYDRANTS

*Your Reliable Partners in Fire-fighting*

Both, the stainless steel\* and the cast iron type have one and the same interior made entirely from corrosion resistant materials as stainless steel, non-ferrous metals and plastics.

\* without type "hydrant with drop jacket "

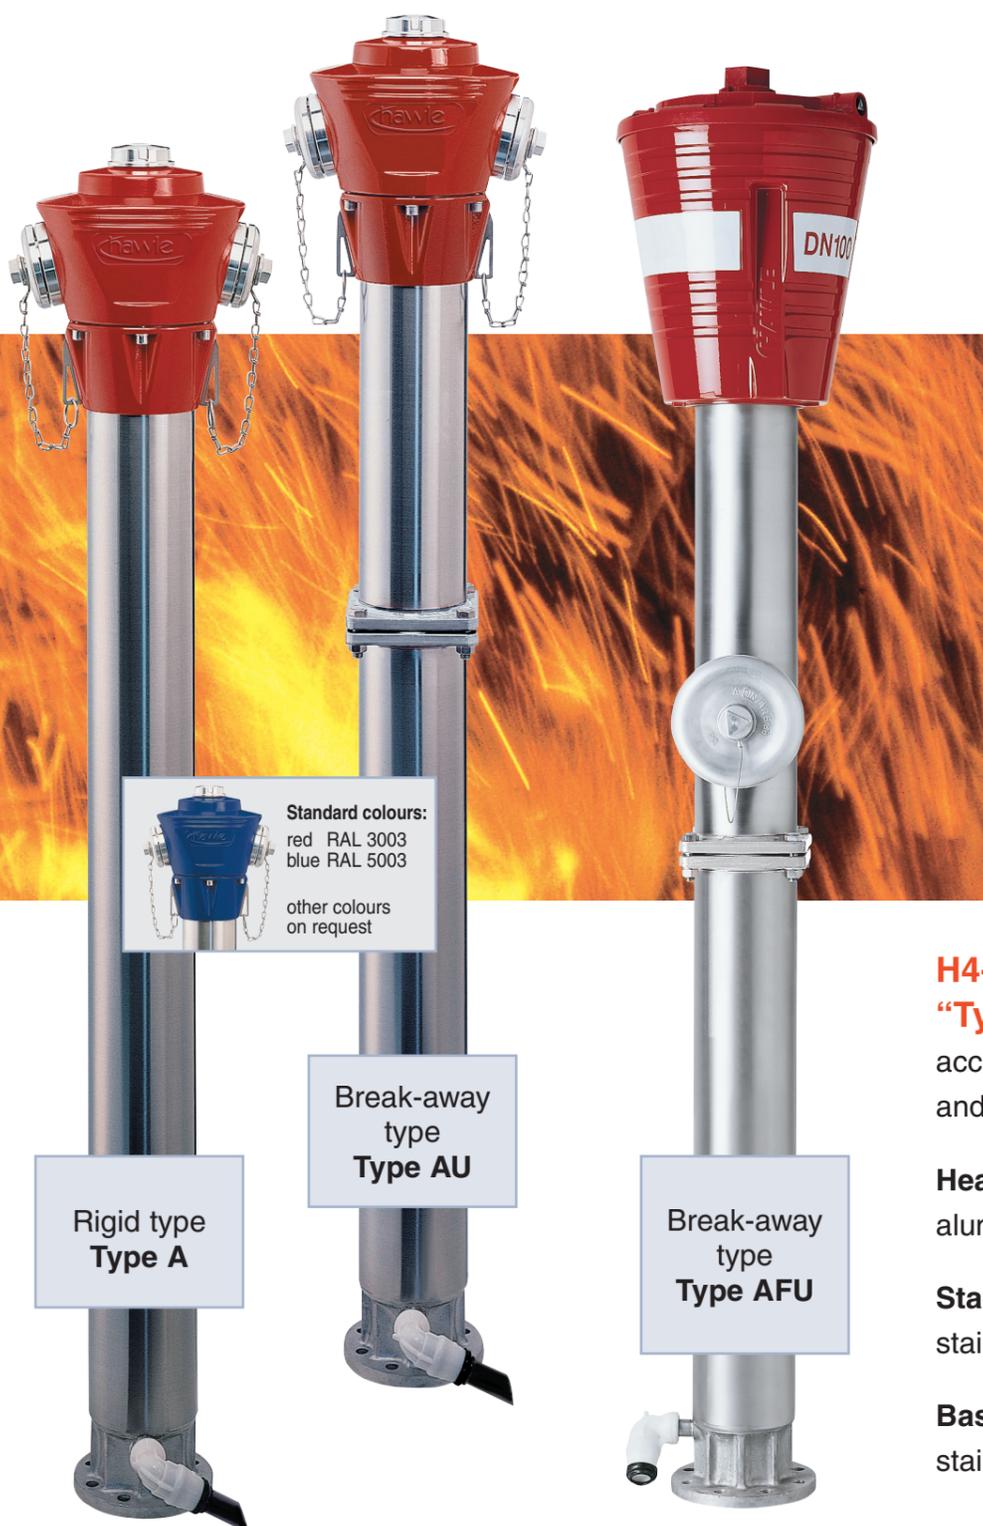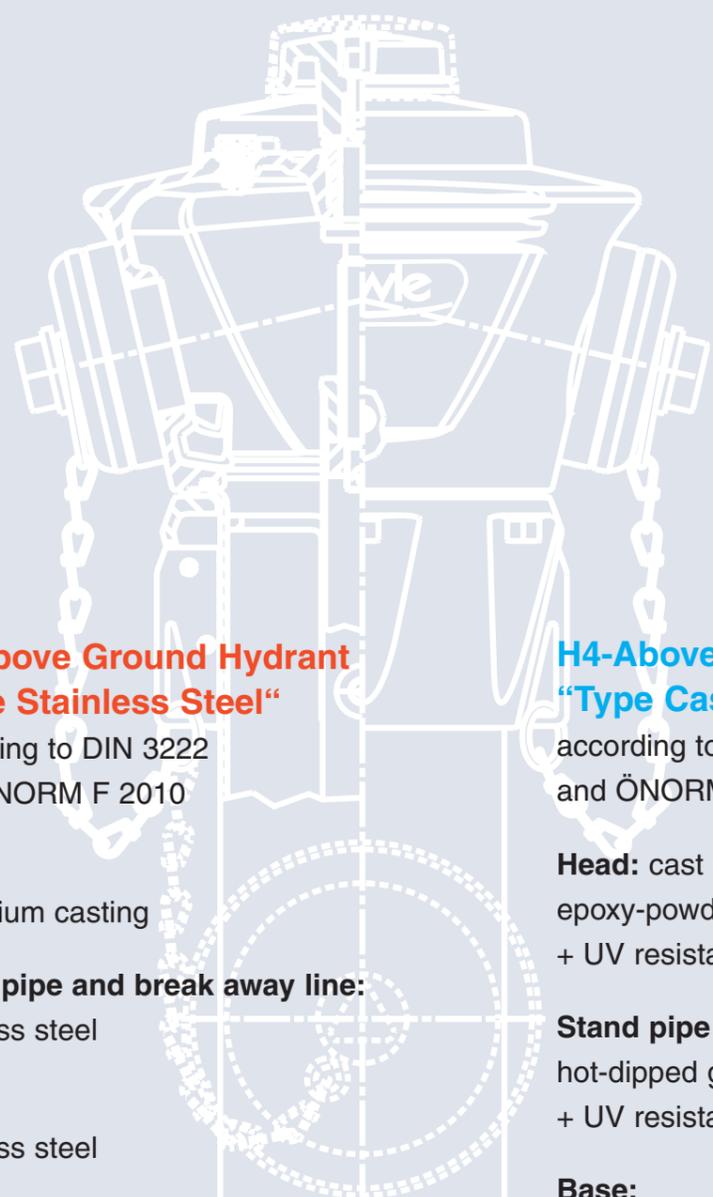

**Standard colours:**  
 red RAL 3003  
 blue RAL 5003  
 other colours on request

Rigid type  
Type A

Break-away type  
Type AU

Break-away type  
Type AFU

### H4-Above Ground Hydrant "Type Stainless Steel"

according to DIN 3222 and ÖNORM F 2010

**Head:** aluminium casting

**Stand pipe and break away line:** stainless steel

**Base:** stainless steel

### H4-Above Ground Hydrant "Type Cast Iron"

according to DIN 3222 and ÖNORM F 2010

**Head:** cast iron epoxy-powder coated + UV resistant paint

**Stand pipe and break away line:** hot-dipped galvanized steel + UV resistant paint

**Base:** ductile iron, epoxy-powder coated



Rigid type  
Type A

Break-away type  
Type AU